

DOMUS

YOUR SOLID GUARANTEE OF QUALITY



PLUMBING PRODUCT CATALOGUE 2017-2018



DOMUS

YOUR SOLID GUARANTEE OF QUALITY



Domus England is a well known and manufacturer of advanced plumbing, heating and engineering products. It's a reputation earned through a total dedication to quality, innovation and customer service that's been the hallmark of the company since it was established in the 1980's

Domus England continues to invest heavily in their manufacturing facilities. These developments, involving significant capital equipment investment, have resulted in major customer benefits including shorter lead times, improved response and reduced costs. Developments that will continue to keep Domus England at the leading edge manufacturing and design in the 21st century.



DOMUS

MADE IN ENGLAND
YOUR SOLID GUARANTEE OF QUALITY

CONTENTS

VALVES AND BRASS FITTINGS



BALL VALVES 5



BIB COCKS 6



STOP COCKS 7



ANGLE VALVES 8-10



FLOAT VALVES AND CHROME FITTINGS 11



CHROME FITTINGS 12



CHECK VALVES 13



FOOT VALVES 14



DRAINS 15

YOUR SOLID GUARANTEE OF QUALITY

DOMUS

DOMUS

VALVES AND BRASS FITTINGS




5
YEAR
GUARANTEE
ENGLAND



BALL VALVE

Ball valve, full flow. Body nickel plated brass. Lever handle. Thread to ISO 228 (equivalent to DIN EN ISO228 and BS EN ISO228). Available in sizes from 1/2" to 2" (suitable for domestic and industrial applications, for Water, Oil & Gas)

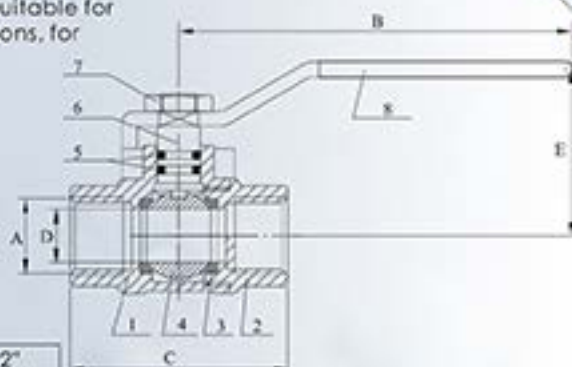


STANDARD PACKING DETAILS AND DIMENSIONS

Size	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"
Catalogue No.	A400/3	A400/4	A400/5	A400/6	A400/7	A400/8
Inner Box Contains	24	18	10	8	5	4
Outer Box Contains	192	144	80	64	40	32
Pressure	50bar 725psi	40bar 580psi	40bar 580psi	30bar 435psi	30bar 435psi	25bar 362.5psi
Dimension A	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"
Dimension B mm	111	111	145	145	170	170
Dimension C mm	61.5	69	83	98	108	128.5
Dimension D mm	15	20	25	32	40	50
Dimension E mm	44	48	55	59	66	73

MATERIAL SPECIFICATION

Key	Component	Material
1	Body	Brass
2	Cover	Brass
3	Seal	PTFE
4	Ball	Brass
5	O-ring	NBR
6	Stem	Brass
7	Nut	Gal. Brass
8	Handle	Brass

BALL VALVE

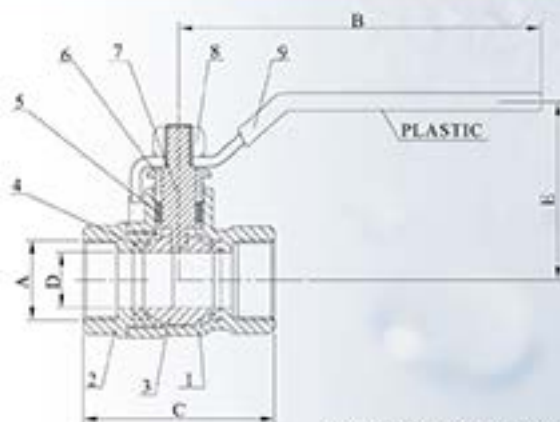

Ball valve, full flow. Body nickel plated brass. Lever handle. Thread to ISO 228 (equivalent to DIN EN ISO228 and BS EN ISO228). Available in sizes from 1/2" to 4" (suitable Water, Oil & Gas)

STANDARD PACKING DETAILS AND DIMENSIONS


Size	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"	2.1/2"	3"	4"
Catalogue No.	D100/3	D100/4	D100/5	D100/6	D100/7	D100/8	D100/9	D100/10	D100/11
Inner Box Contains	24	18	10	8	5	4	6	6	4
Outer Box Contains	192	144	80	64	40	32	6	6	4
Pressure	40bar 580psi	30bar 435psi	30bar 435psi	25bar 362psi	25bar 362psi	18bar 261psi	18bar 261psi	12bar 174psi	12bar 174psi
Dimension A	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"	2.1/2"	3"	4"
Dimension B mm	91	106	128	136	145	159	237	237	237
Dimension C mm	54	62	74	83	94	107	138	155	177
Dimension D mm	14	19	23	31	39	45	63	74	90
Dimension E mm	46	56	60	63	76	84	127	133	147

MATERIAL SPECIFICATION

Key	Component	Material
1	Body	Brass
2	Cover	Brass
3	Ball	Brass
4	Seal	PTFE
5	Sleeve	PTFE
6	Pressure nut	Brass
7	Nut	Gal. Brass
8	Stem	Brass
9	Handle	Steel

BIB COCK

Ball hose bibcock with hose connection. Body nickel plated brass. With steel lever handle. Thread to ISO 228 (equivalent to DIN EN ISO 228 and BS EN ISO 228). Also available in 3/4" and 1".

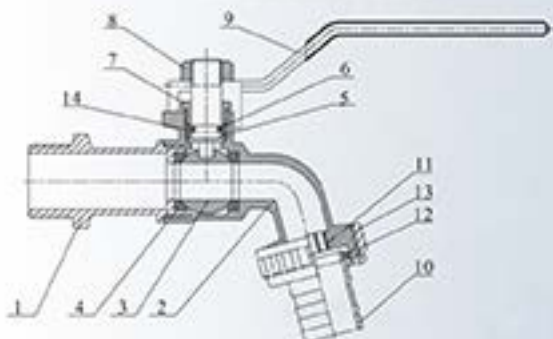

MATERIAL SPECIFICATION

KEY	COMPONENT	MATERIAL
1	CONNECTOR	BRASS
2	BODY	BRASS
3	BALL	BRASS
4	SEAL	PTFE
5	STEM	BRASS
6	O-RING	NBR
7	PRESSURE CAP	BRASS
8	NUT	STEEL
9	HANDLE	STEEL
10	OUTLET	BRASS
11	MANIFOLD	PLASTIC
12	WASHER	NBR
13	LOCK CAP	BRASS

STANDARD PACKING

Size	1/2"	3/4"	1"
Catalogue No.	A310/3	A310/4	A310/5


BIB COCK

Ball hose bibcock with hose connection. Body nickel plated brass. With steel lever handle. Thread to ISO 228 (equivalent to DIN EN ISO 228 and BS EN ISO 228). Also available in 3/4" and 1".



MATERIAL SPECIFICATION

KEY	COMPONENT	MATERIAL
1	CONNECTOR	BRASS
2	BODY	BRASS
3	BALL	BRASS
4	SEAL	PTFE
5	STEM	BRASS
6	O-RING	NBR
7	PRESSURE CAP	BRASS
8	NUT	STEEL
9	HANDLE	STEEL
10	OUTLET	BRASS
11	MANIFOLD	PLASTIC
12	WASHER	NBR
13	LOCK CAP	BRASS

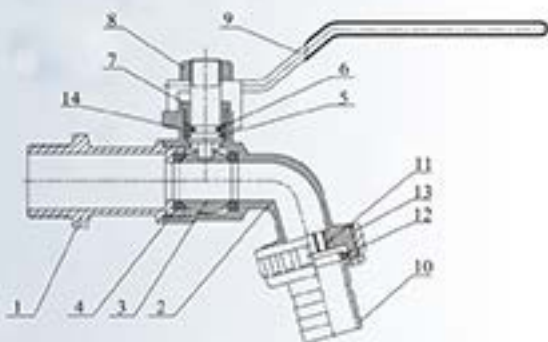


STANDARD PACKING

Size	1/2"	3/4"	1"
Catalogue No.	A311/3	A311/4	A311/5

STOP COCK

Concealed stop cock. Brass body. 5 point handle.
Thread to ISO 228 (equivalent to DIN EN ISO228
and BS EN ISO228).

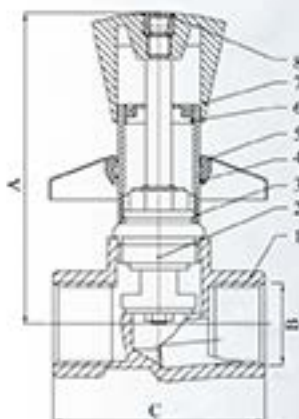STANDARD PACKING DETAILS
AND DIMENSIONS

Size	1/2"	3/4"	1"
Catalogue No.	D205/3	D205/4	D205/5
Inner Box Contains	1	1	1
Outer Box Contains	20	20	20
Full Pallet Contains	960	960	960
Dimension A mm	94	98.5	110
Dimension B	1/2"	3/4"	1"
Dimension C mm	58	68	75

MATERIAL SPECIFICATION

Key	Component	Material
1	Body	Brass
2	Cartridge	Brass/NBR
3	Pipe	Brass
4	O-Ring	NBR
5	Rossete	Brass
6	Nut	ABS
7	Handle	Brass
8	Red and Blue cover	ABS



STOP COCK


Concealed stop cock. Brass body. 3 point handle.
Thread to ISO 228 (equivalent to DIN EN ISO228
and BS EN ISO228).

MATERIAL SPECIFICATION

Key	Component	Material
1	Body	Brass
2	Cartridge	Brass/NBR
3	Pipe	Brass
4	O-Ring	NBR
5	Rossete	Brass
6	Nut	ABS
7	Handle	Brass
8	Red and Blue cover	ABS

STANDARD PACKING DETAILS
AND DIMENSIONS

Size	1/2"	3/4"	1"
Catalogue No.	D206/3	D206/4	D206/5
Inner Box Contains	1	1	1
Outer Box Contains	20	20	20
Full Pallet Contains	960	960	960
Dimension A mm	94	98.5	110
Dimension B	1/2"	3/4"	1"
Dimension C mm	58	68	75

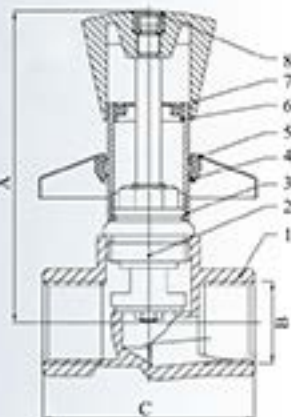


ANGLE VALVE

Brass angle valve 3 point handle, available in long body and short body format. Thread to ISO 228 (equivalent to DIN EN ISO228 and BS EN ISO228).




STANDARD PACKING DETAILS AND DIMENSIONS

Size	1/2"
Catalogue No.	D103/L
Inner Box Contains	1
Outer Box Contains	100
Full Pallet Contains	3200
Dimension A mm	96
Dimension B mm	54
Dimension C	1/2"

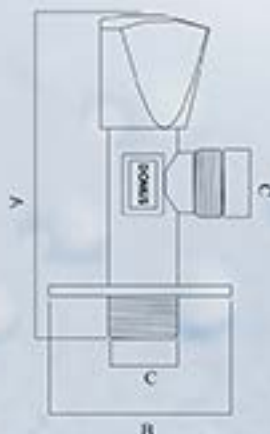

ANGLE VALVE

Brass angle valve 5 point handle, available in long body and short body format. Thread to ISO 228 (equivalent to DIN EN ISO228 and BS EN ISO228).

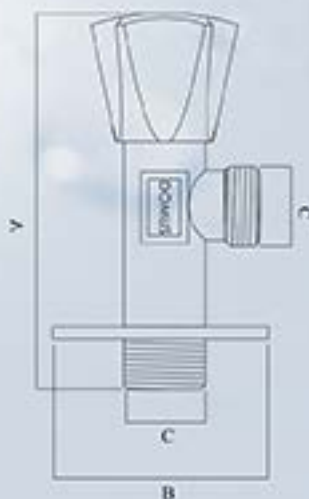


STANDARD PACKING DETAILS AND DIMENSIONS

Size	1/2"
Catalogue No.	D105/3
Inner Box Contains	1
Outer Box Contains	100
Full Pallet Contains	3200
Dimension A mm	95
Dimension B mm	54
Dimension C	1/2"

ANGLE VALVE


Brass angle valve. Thread to ISO 228
(equivalent to DIN EN ISO228 and BS EN ISO228).

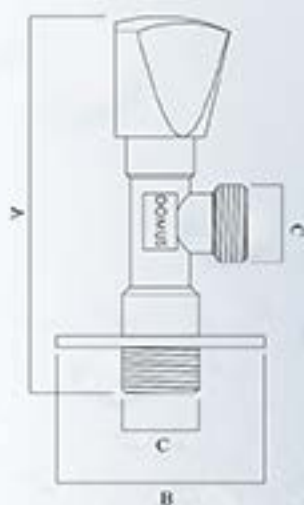STANDARD PACKING
DETAILS AND DIMENSIONS

Size	1/2"
Catalogue No.	D106/3
Inner Box Contains	1
Outer Box Contains	100
Full Pallet Contains	3200
Dimension A mm	98
Dimension B mm	54
Dimension C	1/2"

ANGLE VALVE


Brass angle valve. Thread to ISO 228
(equivalent to DIN EN ISO228 and BS EN ISO228).

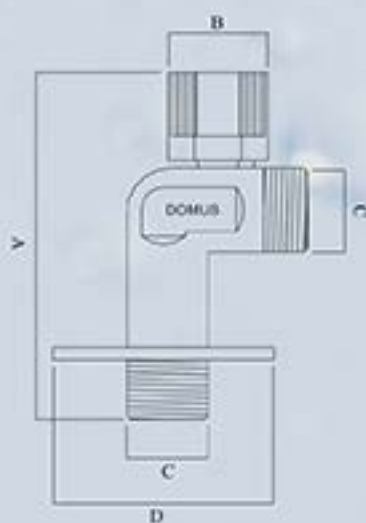STANDARD PACKING
DETAILS AND DIMENSIONS

Size	1/2"
Catalogue No.	D107/3
Inner Box Contains	2
Outer Box Contains	200
Full Pallet Contains	4880
Dimension A mm	87
Dimension B mm	25
Dimension C	1/2"
Dimension D mm	54

ANGLE VALVE

Brass angle valve. Thread to ISO 228
(equivalent to DIN EN ISO228 and BS EN ISO228).

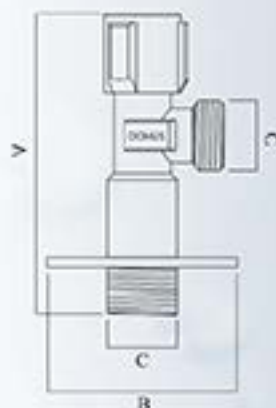

STANDARD PACKING DETAILS AND DIMENSIONS

Size	1/2"
Catalogue No.	D108/3
Inner Box Contains	1
Outer Box Contains	120
Full Pallet Contains	2880
Dimension A mm	88
Dimension B mm	54
Dimension C	1/2"



ANGLE VALVE

Brass angle valve. Thread to ISO 228
(equivalent to DIN EN ISO228 and BS EN ISO228).
Available in Chrome, Copper and Bronze Finish



STANDARD PACKING DETAILS AND DIMENSIONS

Size	1/2"
Catalogue No.	D109/9
Inner Box Contains	1
Outer Box Contains	100
Full Pallet Contains	3200
Dimension A mm	99
Dimension B mm	54
Dimension C	1/2"



ANGLE VALVE

Brass angle valve. Thread to ISO 228
(equivalent to DIN EN ISO228 and BS EN ISO228).
Available in Chrome, Copper and Bronze Finish

STANDARD PACKING DETAILS AND DIMENSIONS


Size	1/2"
Catalogue No.	D110/3
Inner Box Contains	1
Outer Box Contains	100
Full Pallet Contains	3200
Dimension A mm	98
Dimension B mm	54
Dimension C	1/2"



FLOAT VALVE



Brass float valves, suitable up to 12 bar, Thread to ISO 228 (equivalent to DIN EN ISO228 and BS EN ISO228).

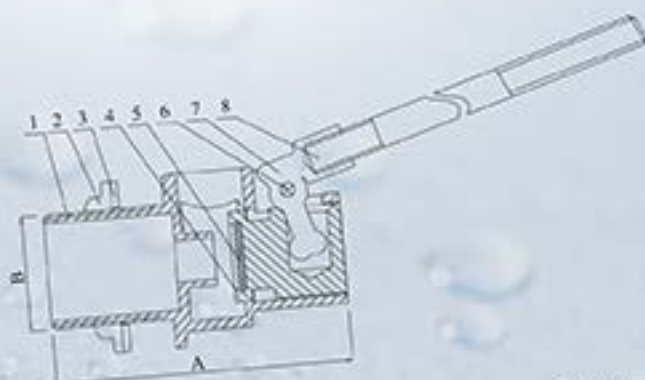

MATERIAL SPECIFICATION

Key	Component	Material
1	Body	Brass
2	Hex nut	Brass
3	Rubber	NBR
4	Cartridge	Brass
5	Seal	NBR
6		Brass
7		Gal. Brass
8	Stem	Brass

STANDARD PACKING DETAILS AND DIMENSIONS

Size	1/2"	3/4"	1"
Catalogue No.	D630/2	D630/3	D630/4
Inner Box Contains	10	10	6
Outer Box Contains	100	60	48
Dimension A	1/2"	3/4"	1"
Dimension B mm	74	74	84
Dimension C mm	275	345	415

EXTENSION

Brass chrome plated extension. Thread to ISO 228 (equivalent to DIN EN ISO228 and BS EN ISO228). Other sizes available on request.



STANDARD PACKING DETAILS AND DIMENSIONS

Size	1/2"x 10mm	1/2"x 15mm	1/2"x 20mm	1/2"x 25mm	1/2"x 30mm
Catalogue No.	D860/10	D860/15	D860/20	D860/25	D860/30
Inner Box Contains	150	125	100	90	75
Outer Box Contains	300	250	200	180	150
Full pallet contains	21600	18000	14400	12600	10800

NIPPLE

Brass chrome plated nipple male. Thread to ISO 228 (equivalent to DIN EN ISO228 and BS EN ISO228). Other sizes available on request.



STANDARD PACKING DETAILS AND DIMENSIONS

Size	1/2"x1/2"
Inner Box Contains	100
Outer Box Contains	200
Full Pallet Contains	14400



TAP CONNECTOR

Brass chrome plated connector with compression nut. Thread to ISO 228 (equivalent to DIN EN ISO228 and BS EN ISO228). Other sizes available on request.

STANDARD PACKING DETAILS AND DIMENSIONS

Size	1/2"x1/2" x10mm
Inner Box Contains	125
Outer Box Contains	250
Full pallet contains	18000

REDUCER

Brass chrome plated bushing male/female. Thread to ISO 228 (equivalent to DIN EN ISO228 and BS EN ISO228). Other sizes available upon request.



STANDARD PACKING DETAILS AND DIMENSIONS

Size	1/2"x3/8"
Catalogue No.	D865/1/3
Inner Box Contains	150
Outer Box Contains	300
Full pallet contains	21600


FOOT VALVE STAINLESS STEEL FILTER

Foot valve with stainless steel filter. Thread to ISO 228 (equivalent to DIN EN ISO228 and BS EN ISO228).



Material Specification

Key	Component	Material
1	Body	Brass
2	Nut	Brass
3	Washer	Stainless steel
4	Cartridge	Brass
5	Spring	Stainless steel
6	Seal	NBR
7	Round nut	ABS
8	Filter	Stainless steel

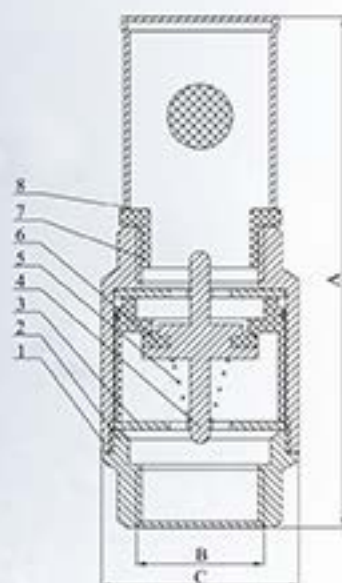


STANDARD PACKING DETAILS AND DIMENSIONS

Size	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"
Catalogue No.	D611/3	D611/4	D611/5	D611/6	D611/7	D611/8
Inner Box Contains	10	8	4	4	2	2
Outer Box Contains	100	80	60	32	24	20
Pressure	10bar 145psi	10bar 145psi	10bar 145psi	8bar 116psi	8bar 116psi	8bar 116psi
Filter	1200µm	1200µm	1200µm	1200µm	1200µm	1200µm
Dimension A mm	98	112	136	152	164.5	187.5
Dimension B	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"
Dimension C mm	37.5	43.5	51.5	63.5	70.5	87

CHECK VALVE

Check Valve with Washer Holder in Brass. Thread to ISO 228 (equivalent to DIN EN ISO228 and BS EN ISO228).

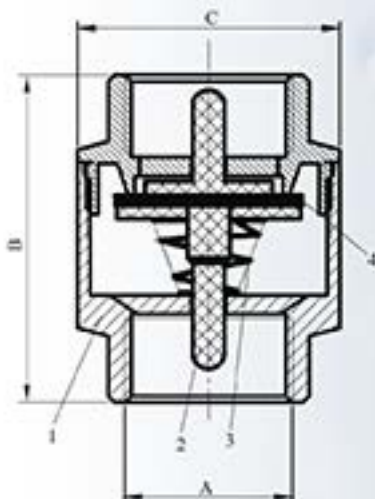


STANDARD PACKING DETAILS AND DIMENSIONS

Size	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"
Catalogue No.	D610/3	D610/4	D610/5	D610/6	D610/7	D610/8
Inner Box Contains	16	16	9	6	4	3
Outer Box Contains	192	128	72	48	48	36
Full pallet contains	7680	4608	3312	1920	1296	972
Pressure	12bar 174psi	12bar 174psi	12bar 174psi	10bar 145psi	10bar 145psi	8bar 116psi
Dimension A	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"
Dimension B mm	46	51	53	61	70	78
Dimension C mm	33	38	44	59	67	80



Y STRAINER

Y Strainer. Brass body, female / female threads and inspection plug, filtration 500µ 1/4" to 2"; 800µ 2 1/2" to 4". Threads to ISO228 (equivalent to DIN EN ISO228 and BS EN ISO228).

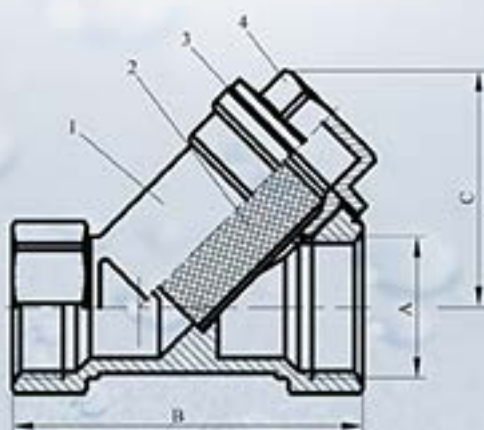


STANDARD PACKING DETAILS AND DIMENSIONS

Size	1/2"	3/4"	1"
Catalogue No.	D640/3	D640/4	D640/5
Inner Box Contains	16	8	5
Outer Box Contains	160	80	40
Full pallet contains	4320	2880	840
Pressure	20bar 290psi	20bar 290psi	20bar 290psi
Dimension A	1/2"	3/4"	1"
Dimension B mm	52	60	77
Dimension C mm	37	47	54

FOOT VALVE BRASS FILTER

Foot valve with brass filter. Thread to ISO 228 (equivalent to DIN EN ISO228 and BS EN ISO228).

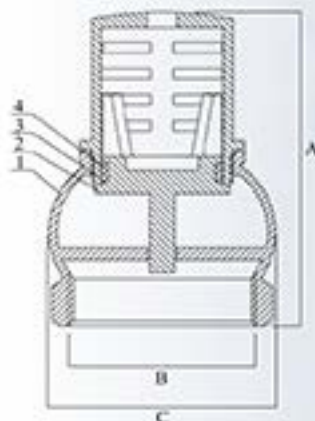

Key	Component	Material
1	Body	Brass
2	Valve flap	Brass
3	Bonnet	Brass
4	Seal ring	NBR

Size	3/4"	1"	1.1/4"	1.1/2"	2"
Catalogue No.	D700/1	D700/2	D700/3	D700/4	D700/5
Dimension A mm	68	73	80	88	100
Dimension B	3/4"	1"	1.1/4"	1.1/2"	2"
Dimension C mm	40	48.5	58.5	62	72.5



FLOOR DRAINS STAINLESS STEEL

Stainless steel floor drain, 65x65 & 80x80mm, available in matt or polished chrome finish.

Catalogue No.	Size	
D1032	65 x 65mm	With fixed screwed grill-(not shown)
D1031	80 x 80mm	With fixed screwed grill-(not shown)
D1028	80 x 80mm	With fixed screwed grill

FLOOR DRAINS STAINLESS STEEL

Stainless steel floor drain, 100x100mm, available in matt or polished chrome finish.

Catalogue No.	Size	
D1029	100 x 100mm	With fixed grill (55mm outlet) - (not shown)
D1030	100 x 100mm	With fixed cover & Rubber seal (clean out) (55mm outlet)
D1026	100 x 100mm	With fixed cover & Rubber seal (clean out) (75mm outlet) - (not shown)



FLOOR DRAINS STAINLESS STEEL

Stainless steel floor drain, 150x150mm, available in matt or polished chrome finish.

Catalogue No.	Size	
D1025	150 x 150mm	With fixed grill and pop up cover rubber o-ring (102mm outlet) - (not shown)
D1027	150 x 150mm	With moveable grill and cover (102mm outlet) - (not shown)
D1033	150 x 150mm	With fixed grill and moveable cover (112mm outlet) - (not shown)
D1034	150 x 150mm	With fixed cover and rubber gasket (112mm outlet)

FLOOR DRAINS STAINLESS STEEL

Stainless steel floor drain, 200x200mm, available in matt or polished chrome finish.

Catalogue No.	Size	
D1001	200 x 200mm	With moveable grill and cover (112mm outlet)
D1002	200 x 200mm	With fixed grill and moveable cover (112mm outlet) - (not shown)
D1003	200 x 200mm	With fixed cover and rubber gasket (112mm outlet) - (not shown)
D1007	200 x 200mm	With moveable grill and cover (112mm outlet) - (not shown)
D1008	200 x 200mm	With fixed grill and moveable cover (102mm outlet) - (not shown)



DOMUS

YOUR SOLID GUARANTEE OF QUALITY



Domus Engineering Ltd is a UK based manufacturer and supplier of a comprehensive range of high quality plumbing products and fittings.

THE STORY: In the 1980s Domus started to manufacture just one simple yet functional product. Due to our trust and the success of our customers, Domus has rapidly become internationally recognized for high level range of cisterns and valves.

Domus now can offer to our partners a complete and continually expanding range of products and fittings.

LOCATION: Like our product range, our company has developed successfully as well. Our Head office is now conveniently located in North London and our production facilities in East Anglia in the United Kingdom.

OUR GOALS: The Company's goal is to allow our distributors to grow while at the same time being aligned to our strategy and values.

QUALITY: Always striving to improve our design and quality, we ensure that Domus products meet the industry leading standards while exceeding our customers' expectations. Where applicable, all our products are manufactured in accordance with British, European and WRAS standards. By adhering to these standards, our distributors can be assured we use the best quality materials and apply the strictest controls during manufacturing and production. This is also the reason why Domus offers a 5 years guarantee on our products.

LOGISTICS: From our UK base, utilising excellent UK and European port facilities, we are able to access reliable and regular freight routes to our international clients with Intertek, SASO Certificates and UK Certificates of Origin.

"Your Solid Guarantee Of Quality"

Domus Engineering Limited
41, The Brentano Suites,
Catalyst House, 720 Centennial Court,
Elstree, Herts, WD6 3SY, United Kingdom
Tel: +44 (0) 20 8953 3991
www.domus-england.co.uk

